



## VERANCE-E

### Technical Specifications | Teknik Özellikler

Body	: Electrostatic Powder Coated DKP Sheet Metal
Diffuser	: Opal Diffuser
Glass	: Tempered Glass
Light Source	: Mid Power LED
CRI	: Ra>80
Input Voltage	: 220-240V AC 50/60Hz
Body Color	: Ral 9016
Usage	: Recessed Ceiling
IP	: IP65

Gövde	: Elektrostatik Toz Boyalı DKP Sac
Reflektör	: Opal Difüzör
Cam	: Temperli Cam
Işık Kaynağı	: Mid Power LED
CRI	: Ra>80
Giriş Gerilimi	: 220-240V AC 50-60Hz
Gövde Rengi	: Ral 9016
Kullanım Şekli	: Sıva Altı
IP	: IP65

### Product Chart | Ürün Tablosu


Product Code	Power	CCT/K	Lumen	Cut Out (mm)
SML211.606.140.00.40.40	40W	4000	4000	575X575
SML211.606.141.00.40.40	40W	4000	4000	575X575
SML211.606.140.00.40.65	40W	6500	4000	575X575
SML211.606.141.00.40.65	40W	6500	4000	575X575

### Options | Opsiyonlar

DALI Compatible  
Emergency Unit (1-3 Hour)  
Suspended Ceiling Compatible : Plasterboard,  
Rockwool, Clip-in

DALI Uyumlu  
Acil Durum Kit'i (1-3 Saat)  
Asma Tavan Uyumlu : Alçıpan, Taşyünü, Clip-in

### Dimensions | Ölçüler

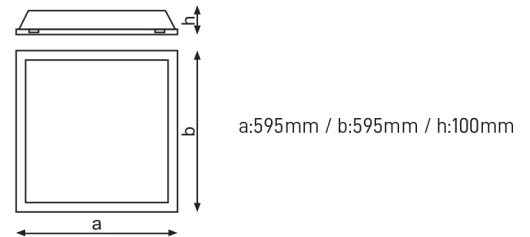

### Photometric Data | Fotometrik Veri

