

LIBELLE

Technical Specifications | Teknik Özellikler


Body	: Electrostatic Powder Coated DKP Sheet Metal
Diffuser	: Opal Diffuser
Light Source	: Mid Power LED
CRI	: Ra>80
Input Voltage	: 220-240V AC 50/60Hz
Body Color	: Ral 9016
Usage	: Surface Mounted / Recessed
IP	: IP20 / IP40

Gövde	: Elektrostatik Toz Boyalı DKP Sac
Difüzör	: Opal Difüzör
Işık Kaynağı	: Mid Power LED
CRI	: Ra>80
Giriş Gerilimi	: 220-240V AC 50-60Hz
Gövde Rengi	: Ral 9016
Kullanım Şekli	: Sıva Üstü / Sıva Altı
IP	: IP20 / IP40

Options | Opsiyonlar

- DALI Compatible
- Emergency Unit (1-3 Hour)
- Suspended Ceiling Compatible : Plasterboard, Rockwool, Clip-in
- DALI Uyumlu
- Acil Durum Kit'i (1-3 Saat)
- Asma Tavan Uyumlu : Alçıpan, Taşyünü, Clip-in

Dimensions | Ölçüler

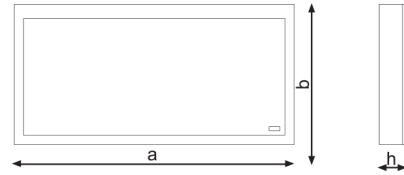

a:1080mm / b:550mm / h:60mm

Product Chart | Ürün Tablosu

Product Code	Power	CCT/K	Lumen	Cut Out (mm)
SML211.306.N10.00.21.40	21W	4000	2.100	295x575
SML211.306.N10.00.21.65	21W	6500	2.100	295x575
SML211.606.N10.00.36.40	36W	4000	3.600	550x1080
SML211.606.N10.00.36.65	36W	6500	3.600	550x1080
SML221.306.N13.00.21.40	36W	4000	3.600	630x550
SML221.606.N13.00.36.65	36W	6500	3.600	630x550

Photometric Data | Fotometrik Veri

