

EGAN

Technical Specifications | Teknik Özellikler

Body	: Aluminium
Diffuser	: Opal Diffuser
Light Source	: Mid Power LED
CRI	: Ra>80
Input Voltage	: 220-240V AC 50-60Hz
Body Color	: Mat Grey
Usage	: Surface Mounted
IP	: IP65

Gövde	: Alüminyum
Difüzör	: Opal Difüzör
Işık Kaynağı	: Mid Power LED
CRI	: Ra>80
Giriş Gerilimi	: 220-240V AC 50-60Hz
Görev Rengi	: Mat Eloksal
Kullanım Şekli	: Sıva Üstü
IP	: IP65

Product Chart | Ürün Tablosu


Product Code	Power	CCT/K	Lumen
SML350.030.U43.00.10.30	10W	3000	1.090
SML350.030.U43.00.10.40	10W	4000	1.130
SML350.030.U43.00.10.65	10W	6500	1.130
SML350.060.U43.00.15.30	15W	3000	1.710
SML350.060.U43.00.15.40	15W	4000	1.785
SML350.060.U43.00.15.65	15W	6500	1.785
SML350.090.U43.00.25.30	25W	3000	2.850
SML350.090.U43.00.25.40	25W	4000	2.925
SML350.090.U43.00.25.65	25W	6500	2.925

Options | Opsiyonlar

DALI Compatible
Emergency Unit : (1-3 Hour)

DALI Uyumlu
Acil Durum Kiti : (1-3 Saat)

Dimensions | Ölçüler

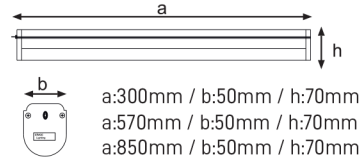

Photometric Data | Fotometrik Veri

