

EGAN-L

Technical Specifications | Teknik Özellikler

Body	: Aluminium
Diffuser	: Opal Diffuser
Light Source	: Mid Power LED
CRI	: Ra>80
Input Voltage	: 220-240V AC 50-60Hz
Body Color	: Mat Grey
Usage	: Surface Mounted
IP	: IP65

Gövde	: Alüminyum
Difüzör	: Opal Difüzör
Işık Kaynağı	: Mid Power LED
CRI	: Ra>80
Giriş Gerilimi	: 220-240V AC 50-60Hz
Görev Rengi	: Mat Eloksal
Kullanım Şekli	: Sıva Üstü
IP	: IP65


Product Chart | Ürün Tablosu

Product Code	Power	CCT/K	Lumen
SML350.120.U43.00.36.30	36W	3000	3.780
SML350.120.U43.00.36.40	36W	4000	3.960
SML350.120.U43.00.36.65	36W	6500	3.960
SML350.150.U43.00.50.30	50W	3000	5.250
SML350.150.U43.00.50.40	50W	4000	5.500
SML350.150.U43.00.50.65	50W	6500	5.500

Options | Opsiyonlar

DALI Compatible
Emergency Unit : (1-3 Hour)
DALI Uyumlu
Acil Durum Kiti : (1-3 Saat)

Dimensions | Ölçüler

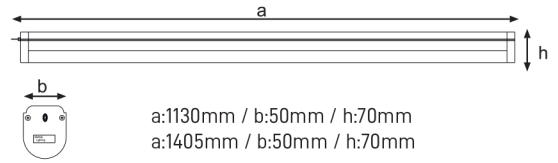

Photometric Data | Fotometrik Veri

