



DRACO-M

Technical Specifications | Teknik Özellikler

| | |
|---------------|-----------------------|
| Body | : DKP Sheet Metal |
| Reflector | : DKP Sheet Metal |
| Glass | : Tempered |
| Light Source | : Mid Power LED |
| CRI | : Ra>80 |
| Input Voltage | : 220-240V AC 50/60Hz |
| Body Color | : Ral 9006 |
| Usage | : Surface Mounted |
| IP | : IP65 |


| | |
|----------------|-----------------------|
| Gövde | : DKP Sac |
| Reflektör | : DKP Sac |
| Cam | : Temperli |
| Işık Kaynağı | : Mid Power LED |
| CRI | : Ra>80 |
| Giriş Gerilimi | : 220-240V AC 50-60Hz |
| Gövde Rengi | : Ral 9006 |
| Kullanım Şekli | : Sıva Üstü |
| IP | : IP65 |

Options | Opsiyonlar

DALI Compatible
Emergency Unit (1-3 Hour)

DALI Uyumlu
Acil Durum Kit'i (1-3 Saat)

Dimensions | Ölçüler

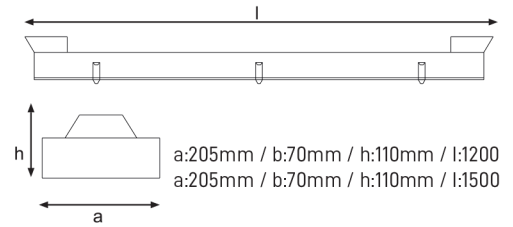

Product Chart | Ürün Tablosu

| Product Code | Power | CCT/K | Lumen |
|--------------------------|-------|-------|-------|
| SML102.120.Y43.00.075.40 | 75W | 4000 | 10125 |
| SML102.120.Y43.00.100.40 | 100W | 4000 | 13500 |
| SML102.150.Y43.00.120.40 | 120W | 4000 | 16200 |
| SML102.120.Y43.00.075.65 | 75W | 6500 | 10125 |
| SML102.120.Y43.00.100.65 | 100W | 6500 | 13500 |
| SML102.150.Y43.00.120.65 | 120W | 6500 | 16200 |

Photometric Data | Fotometrik Veri

