

HIGH CEILING

LUMINAIRE

YÜKSEK TAVAN
ARMATÜR





DRACO-S

Technical Specifications | Teknik Özellikler

Body	: DKP Sheet Metal
Reflector	: DKP Sheet Metal
Glass	: Tempered
Light Source	: Mid Power LED
CRI	: Ra > 80
Input Voltage	: 220-240V AC 50/60Hz
Body Color	: Ral 9006
Usage	: Surface Mounted
IP	: IP65

Gövde	: DKP Sac
Reflektör	: DKP Sac
Cam	: Temperli
Işık Kaynağı	: Mid Power LED
CRI	: Ra > 80
Giriş Gerilimi	: 220-240V AC 50/60Hz
Gövde Rengi	: Ral 9006
Kullanım Şekli	: Sıva Üstü
IP	: IP65

Product Chart | Ürün Tablosu


Product Code	Power	CCT/K	Lumen
SML101.120.Y43.00.40.40	40W	4000	5280
SML101.120.Y43.00.50.40	50W	4000	6600
SML101.150.Y43.00.50.40	65W	4000	8580
SML101.120.Y43.00.40.65	40W	6500	5280
SML101.120.Y43.00.50.65	50W	6500	6600
SML101.150.Y43.00.50.65	65W	6500	8580

Options | Opsiyonlar


DALI Compatible
Emergency Unit (1-3 Hour)

DALI Uyumlu
Acil Durum KİT'i (1-3 Saat)

Dimensions | Ölçüler

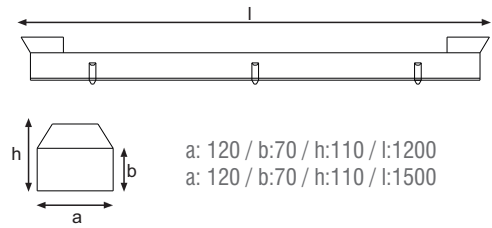

Photometric Data | Fotometrik Veri





DRACO-M

Technical Specifications | Teknik Özellikler

Body	: DKP Sheet Metal
Reflector	: DKP Sheet Metal
Glass	: Tempered
Light Source	: Mid Power LED
CRI	: Ra > 80
Input Voltage	: 220-240V AC 50/60Hz
Body Color	: Ral 9006
Usage	: Surface Mounted
IP	: IP65

Gövde	: DKP Sac
Reflektör	: DKP Sac
Cam	: Temperli
Işık Kaynağı	: Mid Power LED
CRI	: Ra > 80
Giriş Gerilimi	: 220-240V AC 50/60Hz
Gövde Rengi	: Ral 9006
Kullanım Şekli	: Sıva Üstü
IP	: IP65

Product Chart | Ürün Tablosu


Product Code	Power	CCT/K	Lumen
SML102.120.Y43.00.075.40	75W	4000	10125
SML102.120.Y43.00.100.40	100W	4000	13500
SML102.150.Y43.00.120.40	120W	4000	16200
SML102.120.Y43.00.075.65	75W	6500	10125
SML102.120.Y43.00.100.65	100W	6500	13500
SML102.150.Y43.00.120.65	120W	6500	16200

Options | Opsiyonlar


DALI Compatible
Emergency Unit (1-3 Hour)

DALI Uyumlu
Acil Durum KİT'i (1-3 Saat)

Dimensions | Ölçüler

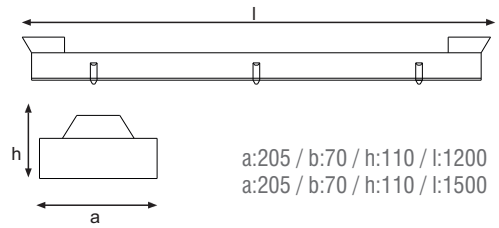

Photometric Data | Fotometrik Veri





DRACO-L

Technical Specifications | Teknik Özellikler

Body	: DKP Sheet Metal
Reflector	: DKP Sheet Metal
Glass	: Tempered
Light Source	: Mid Power LED
CRI	: Ra > 80
Input Voltage	: 220-240V AC 50/60Hz
Body Color	: Ral 9006
Usage	: Surface Mounted
IP	: IP65

Gövde	: DKP Sac
Reflektör	: DKP Sac
Cam	: Temperli
Işık Kaynağı	: Mid Power LED
CRI	: Ra > 80
Giriş Gerilimi	: 220-240V AC 50/60Hz
Gövde Rengi	: Ral 9006
Kullanım Şekli	: Sıva Üstü
IP	: IP65

Product Chart | Ürün Tablosu


Product Code	Power	CCT/K	Lumen
SML104.120.Y43.00.150.40	150W	4000	20100
SML104.120.Y43.00.175.40	175W	4000	23800
SML104.120.Y43.00.195.40	195W	4000	26325
SML104.150.Y43.00.245.40	245W	4000	33075
SML104.120.Y43.00.150.65	150W	6500	20100
SML104.120.Y43.00.175.65	175W	6500	23800
SML104.120.Y43.00.195.65	195W	6500	26325
SML104.150.Y43.00.245.65	245W	6500	33075

Options | Opsiyonlar


DALI Compatible
Emergency Unit (1-3 Hour)


DALI Uyumlu
Acil Durum KİT'i (1-3 Saat)

Dimensions | Ölçüler

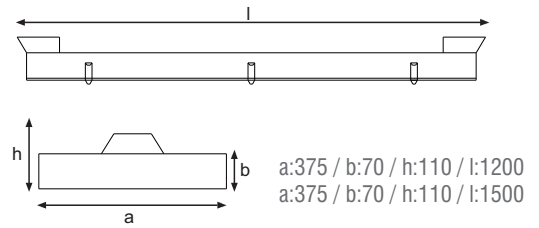

Photometric Data | Fotometrik Veri



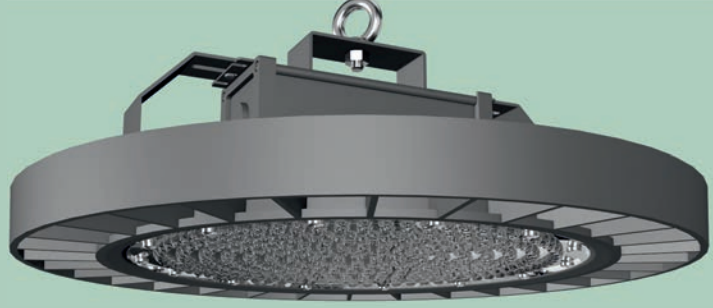

DEVLİN

Technical Specifications | Teknik Özellikler

Body	: Aluminium Injection
Glass	: Tempered
Light Source	: Mid Power LED
CRI	: Ra > 80
Input Voltage	: 220-240V AC 50/60Hz
Body Color	: Ral 9005
Usage	: Surface Mounted
IP	: IP65

Gövde	: Alüminyum Enjeksiyon
Cam	: Temperli
Işık Kaynağı	: Mid Power LED
CRI	: Ra > 80
Giriş Gerilimi	: 220-240V AC 50/60Hz
Gövde Rengi	: Ral 9005
Kullanım Şekli	: Sıva Üstü
IP	: IP65

Product Chart | Ürün Tablosu


Product Code	Power	CCT/K	Lumen
SML105.400.Y43.00.090.40	90W	4000	10.800
SML105.400.Y43.00.110.40	110W	4000	13.200
SML105.400.Y43.00.130.40	130W	4000	15.600
SML105.400.Y43.00.180.40	180W	4000	21.600
SML105.400.Y43.00.090.65	90W	6500	10.800
SML105.400.Y43.00.110.65	110W	6500	13.200
SML105.400.Y43.00.130.65	130W	6500	15.600
SML105.400.Y43.00.180.65	180W	6500	21.600

Options | Opsiyonlar

DALI Compatible
Emergency Unit (1-3 Hour)


DALI Uyumlu
Acil Durum KİT'i (1-3 Saat)

Dimensions | Ölçüler

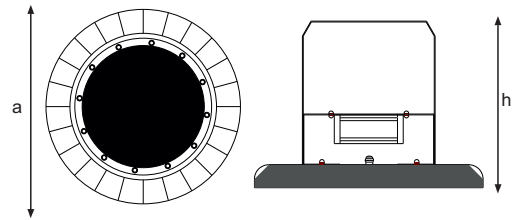

a: 398mm / h:250mm

Photometric Data | Fotometrik Veri





DIUMAL

Technical Specifications | Teknik Özellikler

Body	: Aluminium Injection
Glass	: Tempered
Light Source	: Mid Power LED
CRI	: Ra > 80
Input Voltage	: 220-240V AC 50/60Hz
Body Color	: Ral 9016
Usage	: Surface Mounted
IP	: IP65

Gövde	: Alüminyum Enjeksiyon
Cam	: Temperli
Işık Kaynağı	: Mid Power LED
CRI	: Ra > 80
Giriş Gerilimi	: 220-240V AC 50/60Hz
Gövde Rengi	: Ral 9016
Kullanım Şekli	: Sıva Altı
IP	: IP65

Product Chart | Ürün Tablosu


Product Code	Power	CCT/K	Lumen
SML202.425.Y43.00.080.40	80W	4000	8320
SML202.425.Y43.00.100.40	100W	4000	10000
SML202.425.Y43.00.120.40	120W	4000	12600
SML202.425.Y43.00.150.40	150W	4000	15000
SML202.425.Y43.00.080.65	60W	6500	8320
SML202.425.Y43.00.100.65	75W	6500	10000
SML202.425.Y43.00.120.65	100W	6500	12600
SML202.425.Y43.00.150.65	120W	6500	15000

Options | Opsiyonlar

DALI Compatible
Emergency Unit (1-3 Hour)

DALI Uyumlu
Acil Durum KİT'i (1-3 Saat)

Dimensions | Ölçüler

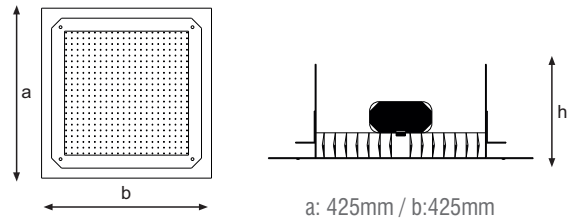

Photometric Data | Fotometrik Veri

