



## INTERNA-6&8

### Technical Specifications | Teknik Özellikler

Body	: Aluminium
Diffuser	: Opal Diffuser
Light Source	: Mid Power LED
CRI	: Ra>80
Input Voltage	: 220-240V AC 50/60Hz
Body Color	: Ral 7002
Frame Color	: Ral 9003
Usage	: Recessed Ceiling
IP	: IP20 / IP40

Gövde	: Alüminyum
Difüzör	: Opal Difüzör
Isık Kaynağı	: Mid Power LED
CRI	: Ra>80
Giris Gerilimi	: 220-240V AC 50/60Hz
Gövde Rengi	: Ral 7002
Çerçeve Rengi	: Ral 9003
Kullanma Şekli	: Sıva Altı
IP	: IP20 / IP40


### Product Chart | Ürün Tablosu

Product Code	Power	CCT	Lumen	Cut Out (mm)
SML351.106.D10.00.18.30	18W	3000	1854	Ø158
SML351.106.D10.00.18.40	18W	4000	1962	Ø158
SML351.106.D10.00.18.65	18W	6500	1962	Ø158
SML351.108.D10.00.26.30	26W	3000	2678	Ø190
SML351.108.D10.00.26.40	26W	4000	2834	Ø190
SML351.108.D10.00.26.65	26W	6500	2834	Ø190

### Options | Opsiyonlar

Sensor Compatible
DALI Compatible
Emergency Unit : (1-3 Hour)
Sensör Uyumlu
DALI Uyumlu
Acil Durum Kiti : (1-3 Saat)

### Dimensions | Ölçüler

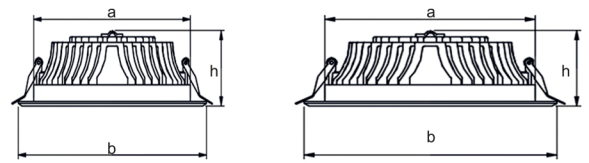

a:0,158mm / b:0,190mm / h:55mm a:0,190mm / b:0,225mm / h:61mm

### Photometric Data | Fotometrik Veri

