

LOON

Technical Specifications | Teknik Özellikler

Body	: Electrostatic Powder Coated Aluminium Extrusion Body
Diffuser	: Opal Diffuser
Light Source	: Mid Power LED
CRI	: Ra>80
Input Voltage	: 220-240V AC 50-60Hz
Body Color	: Ral 9016 / Optional
Usage	: Surface Mounted / Pendant
IP	: IP20 / IP40

Gövde	: Elektrostatik Toz Boyalı Alüminyum Ekstrüzyon Gövde
Difüzör	: Opal Difüzör
Işık Kaynağı	: Mid Power LED
CRI	: Ra>80
Giriş Gerilimi	: 220-240V AC 50-60Hz
Görev Rengi	: Ral 9016 / Opsiyonel
Kullanım Şekli	: Sıva Üstü / Sarkıt
IP	: IP20 / IP40

Product Chart | Ürün Tablosu


Product Code	Power	CCT	Lumen
SML101.104.100.13.00.20.30	20W	3000	2.300
SML101.104.100.13.00.20.40	20W	4000	2.500
SML101.104.120.13.00.25.30	25W	3000	2.875
SML101.104.120.13.00.25.40	25W	4000	3.125
SML101.104.100.14.00.20.30	20W	3000	2.300
SML101.104.100.14.00.20.40	20W	4000	2.500
SML101.104.120.14.00.25.30	25W	3000	2.875
SML101.104.120.14.00.25.40	25W	4000	3.125

Options | Opsiyonlar

DALI Compatible
Emergency Unit : (1-3 Hour)
It Can Be Produced in Desired Sizes and in
Diffrent Combinations.

DALI Uyumlu
Acil Durum Kiti : (1-3 Saat)
İstenilen Ölçülerde ve Farklı Kombinasyonlarda
Üretilebilir.

Dimensions | Ölçüler

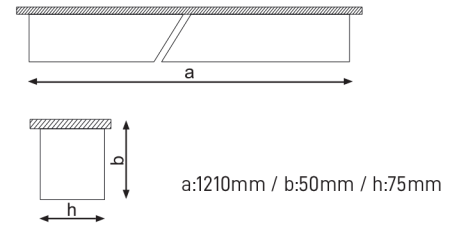

Photometric Data | Fotometrik Veri

